



RMS 130W

MAX 260W

MAD X2-694

A MAD SPEAKER TO FIT EVERY NEED

There's nothing better than replacing that old dusty wannabe speaker that's been hiding behind your door panel. Did your old speakers break 'cause they couldn't handle your level of LOUD? The X2 series is ready for you. Be proud, be loud, be MAD!

YOUR CAR WAS MADE FOR THE X2 SERIES

Just the way you like it, just the way your car wants it – uncomplicated and made to fit like a glove. The speaker has a 13mm silk dome tweeter with NEO magnet structure and a newly developed tweeter faceplate to up your LOUD game! In boring science terms, this means you get an increased dispersion and off-axis reproduction. It also makes the speaker a perfect fit for non-ideal OEM speaker placement. The column that holds the tweeter also contains an inline crossover. This invisible placement makes the look of the speaker extra sleek.

DESIGNED TO BE DURABLE

Our research department has truly gone MAD! For our MAD S2 subwoofers we developed a new kind of IMPP cone & USG™ rubber woofer surround. We decided that these were so good – we brought them over to the X2 series. This means that the X2 series speakers are very durable, moist proof and ready to kick some ass!

SWEDISH DESIGN, MAD SENSIBILITIES

The 25mm KSV voice coil is wound with lightweight CCAW (Copper Clad Aluminum Wire) that creates a dynamic sound. Since the Swedish weather encompasses all different seasons – the X2 series is designed to withstand them all. Hot, cold, UV rays – it doesn't matter. It's MAD and it's made to play LOUD, no matter the circumstances!

DID YOU BUY A X2-694? CONGRATULATIONS!

For the X2-694 speaker we took our sound obsession one step further; the speaker is bigger, so it needs to be LOUDER! We've included a 39mm PEI midrange for sound that leaves you wanting more, with exceptionally balanced and clear vocals. We dare you, try to find another speaker in this price range that creates this much envy!


SPECIFICATIONS

MAD X2-694


Component	Triaxial speaker
Woofer size	6x9" (235x165mm)
Midrange size	1,5" (39mm)
Tweeter size	0,51" (13mm)
Nominal impedance	4 Ohm
Power RMS	130W
Power MAX	260W
Freq. response	50-21 000Hz
Sensitivity	94dB

Woofer cone	IMPP + USG™
Woofer basket	Resonance Free Steel
Woofer suspension	NBR Rubber
Woofer magnet	HQ Ferrite
Woofer spider	Nomex/Cotton
Midrange cone	PEI
Midrange magnet	HQ Ferrite
Midrange crossover	HP 6dB HQ (100V)
Tweeter dome	Silk
Tweeter magnet	Neodymium
Tweeter crossover	HP 6dB HQ (100V)

DIMENSIONS (mm)

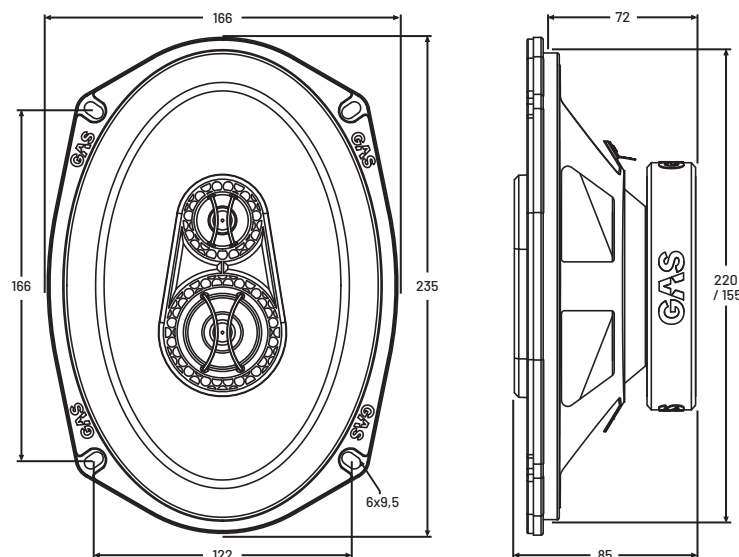


PARTS INCLUDED



Speaker
(2pcs)




Grill
(2pcs)



Cable 3m
(2pcs)



Screws
(8pcs)



Manual